

SPECIFICATIONS

GLS-2000				
Type	Short	Middle	Long	
Distance¹				
Detail (90% reflectivity)	100m	100m	100m	
High Speed (90% reflectivity)	130m	210m	210m	
Low Power (90% reflectivity)	130m	210m	210m	
Standard (90% reflectivity)	-	350m	500m	
Close Scan (9% reflectivity)	40m	40m	40m	
Scanning Part				
Scan mode ²	Detail	High Speed	Low Power	Standard
Scan data rate (Maximum points per second)	120,000	120,000	48,000	60,000
Laser Class	Class 3R		Class 1	Class 3R
Laser	1064nm			
Scanning Density (Resolving Power)				
Spot Size(FWHM)	φ ≤4mm 1 to 20m	φ ≤11mm 1 to 150m		
Point Increment	Minimum 3.1mm (At 10m)			
Maximum Point Number	V:15,202 Pt/Line (270°) H:20,268 Pt/Line (360°)			
Field of View	V:270° / H:360°			
Angle Accuracy	H: 6" / V: 6"			
Distance Accuracy	3.5mm (σ) At 1 to 90m	3.5 mm (σ) At 1 to 110m	4.0mm (σ) At 1 to 110m	3.5mm (σ) At 1 to 150m
Surface Accuracy	2.0mm (σ) At 1 to 90m At 1 to 110m At 1 to 110m At 1 to 150m			
Height Measurement				
Measuring Range	0.3 to 2.0m			
Measuring Accuracy	3.0mm (Req. Special Target)			
Camera Part				
Field Angle	Wide : Diagonal 170° Tele. : 8.9°(V) x 11.9°(H)			
Number of pixels	Both Wide & Tele. 5megapixels			
Tilt Sensor				
Type	Liquid 2-axis tilt-sensor			
Compensation Range	±6'			
Display Unit				
Type	TFT-LCD 3.5 VGA with touch-panel			
Others				
Laser Plummet	Spot Size ∅1mm (1m) / ∅4mm (1.5m)			
Imaging Plummet	Magnification range 1m			
Interface				
Card Slot	SD card (SDHC Class 6 or more)			
Power Supply				
Internal Battery	BDC70			
Capacity	5240mAh / 1pce x 4pcs			
Nominal Voltage	7.4V / 1pce x pcs			
Working Duration	2.5 hours (4pcs continuous scanning)			
Appearance				
Dimension	228(D)×293 (W)×412 (H) mm(With handle & Base)			
Inst height	226mm (From top of base to center of Miller)			
Weight	10kg (Include Base and Battery)			
Condition				
Operating Temperature	-5 to +45°C			
Storage Temperature	-20 to +60°C			
Water & Dust Resistance	IP54 (JIS C0920, IEC 60529)			

*1: It will be different depends on the condition. *2: Specification of Close Scan mode is listed inside the catalog.



Standard Components

- GLS-2000
- Battery (BDC70) 4 pieces
- Battery Charger (CDC68A) 2 pieces
- Charging Cable (EDC113) 2 pieces
- Carrying case
- Silica gel
- Wiping cloth
- SD card
- SD card case
- Tooling kit
- Target sheet
- Centering target
- Instruction manual
- Warranty card



TOPCON CORPORATION

75-1 Hasunuma-cho, Itabashi-ku, Tokyo 174-8580, Japan
www.topcon.co.jp

<Contact to>

Topcon Sokkia India Private Limited

Unit No.101 to 106A, 1st Floor, ABW Tower, MG Road, Sector-25,
IFFCO Chowk, Gurgaon, Haryana-122001,India
Phone: 91-124-484-7676
Email : sales@topconsokkia.ind.in
Web : http://www.topconsokkia.ind.in/

- Specifications may vary by region and are subject to change without notice.
- Windows® is a registered trademark of Microsoft Corporation in the United States and other countries.
- Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Topcon is under license.
- Other trademarks and trade names are those of their respective owners.

Your local Authorized Dealer is:

3D Mass Data
Software Solution
MAGNET Collage Compliant!



GLS-2000

CAPTURE REALITY

3D Laser Scanner



Multiple Range Laser Scanner for Wide Range of Applications

Three models are selectable for different applications by the measuring ranges

- Speedy, precise scanning with variable range settings
- "Precise Scan Technology II" providing high quality point cloud data with reduced noise
- World's first "Direct Height Measurement"
- Easy and accurate registration methods
- Onboard software with intuitive and easy operation

Change the site to 3D quickly!

GLS-2000

3D Survey Site

Near Trees or Obstacles
Quality Up!

Strong Winds
Tough!

Slope Surface, Structure
Quality Up!

Volume Control

Work Efficiency increase
Save Time!

Accuracy and Repeatability of 3D data by measuring Surface
Quality Up!

Registration, 3D Data Output, Alliance with 3rd party software
Save Time!

As Built Management

Quality Up!

Save Time!

Long 500m
Middle 350m
Short 130m

Three models are selectable for different applications by the measuring ranges

Distance measuring range is adequately selectable for applications from short distances, such as facility or interior measurement, to as-built measurement in civil engineering sites and for larger structures.

TOF measurement with improved speed

TOF measurement, with quality data with less noise, is further enhanced with ultra high-speed direct sampling technology, resulting in quick and accurate measurement.

Point interval at 10m distance	Measuring time*
25mm	approx 55 sec
12.5mm	approx 1 min 50 sec
6.3mm	approx 6 min 55 sec

*High speed mode

Easy and intuitive on-board control software

With the on-board control software, the scanning can be simply started with one-touch of button.

Together with color graphical display, scanning operation can be intuitively proceeded.

Only TOPCON

World's First Direct Instrument Height Measurement

The GLS-2000 has an exclusive function that accurately measures the instrument height with a one-touch operation, enabling accurate point cloud measurement.

Dual camera

Equipped with dual camera, 170° wide angle camera (5megapixels) and 8.9° narrow angle camera (5megapixels) which is arranged in coaxial with the measuring axis. The wide-angle camera obtains images at high speed.

WLAN Connectivity for connection to an Android Tablet *

GLS-2000 includes WLAN capability allowing users to control the GLS-2000 remotely from an Android tablet. All keyboard and mouse events on the tablet are relayed to the scanner over a network.

* Offered as an option in some areas.

PRIMARY FEATURES

- Wide angle camera
- Narrow angle camera
- Removable handle
- VGA Color Touch Display
- Battery (detachable)
- SD Card Slot
- On-board software

8 types of measurement mode supported

The GLS-2000 provides a wide range of measuring modes to accommodate different job site demands to achieve accurate measurement and increased productivity regardless of site conditions.

Road / Road (High Power) Mode

New Laser profile has achieved the strong reflectivity for dark, even flat, asphalt road surface with vertical density.

360 degree prism target scanning

GLS-2000 can do target scanning 360 degree prism -ATP1/2 - from wide direction without facing the prism to GLS-2000.

Close (High Power) Mode

Effective for interior HVAC or shiny ductwork. Collected scan data are shown in square grid.

First pulse/ last pulse selection

Depending on the location of the objects (as illustrated), a single emitted pulse from the instrument may be reflected partially by front objects (tree and net fence in the illustration) and the object in the back (house), and received by the instrument as multiple reflected beams. The GLS-2000 can recognize the "first pulse" and "last pulse" under such situation and offers first/last pulse selection to be taken as measuring result.

This technology is quite effective, especially on job sites where there are trees or fencing in front of the object to be measured.

Precise Scan Technology II realizes highly accurate and high speed scanning

The GLS-2000 emits pulse signals three times faster than the previous model. This fast pulse signal has a clear signal wave form, and the signal timing can be detected more precisely in signal processing, which brings highly accurate measurement results.

Supporting Various Registration methods

The GLS-2000 can execute field work similar to that of total stations by supporting various registration methods.

	Traverse	Resection	Tie Point	Shape Matching	Manual Registration	Station Set
Target Setting	Necessary (1 point)	Necessary (More than 2 points)	Necessary (many)	Unnecessary	Unnecessary	Combined Registration
Localization	Possible	Possible	Possible	Not Possible	Not Possible	
Working Time	Quick	Quick	Long *	Quick	Quick	
Registration Accuracy	High	High	Standard	Low	Low	

* Multiple target scanning is necessary

Traverse Method Simple High accuracy

Effective for long distance measurement or the site with complicated object shape by high accurate merging.

Resection Simple High accuracy

Good for Construction site. Set up Station freely.

Tie-point Method High accuracy

Effective for accurate and secure merging of multiple scanned data.

Cloud to Cloud Simple

Effective for quick measurement.

Manual Registration Simple

You can move point cloud effectively.

Station Set Certain

You can combine registered point clouds to register all station set.

MAGNET Collage connects 3D solution to seamless site.

MAGNET Collage is 3D Mass Data Software Solution to support processing, editing, exporting, and integrating point cloud data. 3D model can be created in short time.


MAGNET Collage can generate and integrate 3D Mass Data from multiple sensors in one single platform!

3D Mass Data Software Solution
MAGNET Collage

3D Mass Data Viewer (Optional)



MAGNET Collage Web is the web application to view point cloud mass data via the web browser. It can show slice view, measure a distance and calculate an area so you can check more detail information.

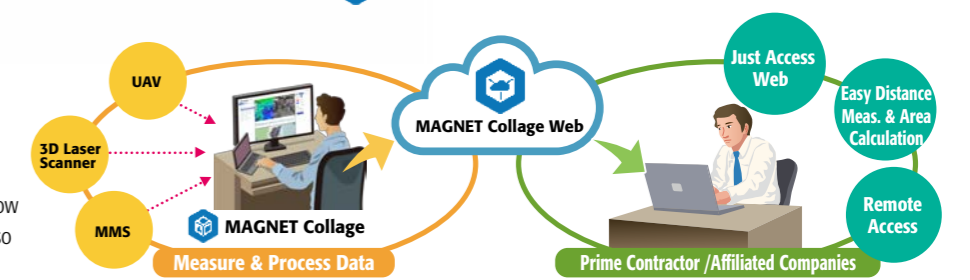

Data Acquisition

Registration

Combine the registered point clouds to register all station set of point clouds.

Quick and Easy Noise Clearing

Coloring each point cloud data of each station, it is easy and quick to clear the noise.

Data Output


Various data output format for point clouds Output format: LAS, E57, RCS, PCD, PTS, PTX, TXT, CLR, CL3, CL3+IJ+ALG, Orthophoto format: Geotiff, Tiff+tifw, Jpeg+jpgw Select the coordinate system of point cloud data to output.

GLS-2000 Stretches the Boundaries of Your Survey Technology

GLS-2000

Volume Measurement

Volume measurement is indispensable for land preparation, open-pit and underground mining, waste landfills and sediment control facilities. GLS-2000 allows the operators heightened sense of safety by eliminating the need for working in an area occupied by heavy machines or in areas where access is dangerous. With 3D point clouds, a cross-section survey can be performed at any given points. High density point clouds allow for accurate calculations of volume and geometry that no other technology can offer.

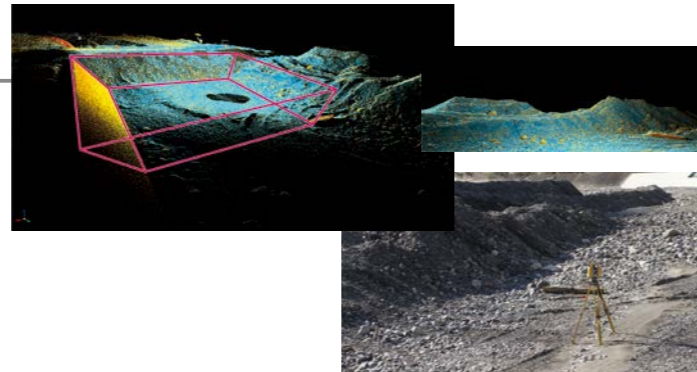


Large Structure

The scanned data of large structures allow for early detection of deteriorated areas to be maintained or reinforced. 3D data can be utilized for measurements of size and geometry, as well as volume calculations of necessary materials. Periodic monitoring is one of the most effective methods to prevent collapse of structures.




Tunnel

GLS-2000 captures 3D data of inner surfaces of tunnels quickly and efficiently. Even the most complex surface, at curves or junction points, profiles can be modeled without difficulty. Monitoring deformation of tunnel wall is an essential measure to prevent collapse of tunnels both under construction and in operation.

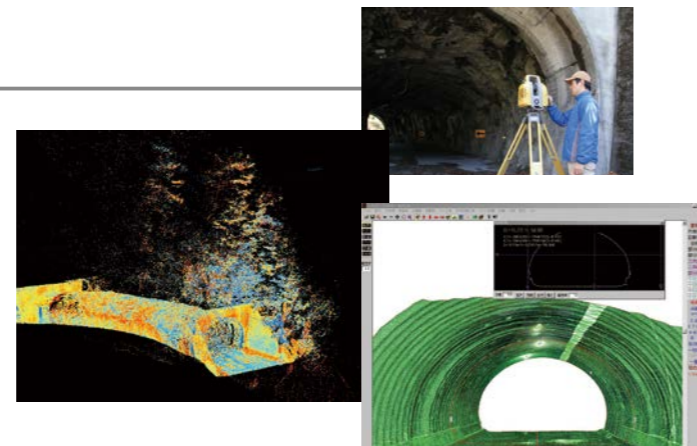


Road Surface, Slope Face Profile

GLS-2000 scans road surface shapes and slope face shapes with exceptional ease and speed. The scanned data allows the sensing of ruts and bumps of road surface and can be utilized for maintenance management. Also the 3D data allows the effective and efficient detection of landslide mass in disaster area and deterioration of the slope face such as distortion or cracks.

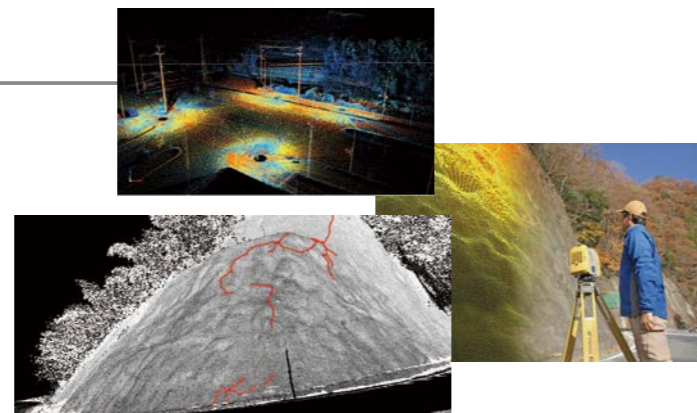


BIM (Building Information Modeling)

The laser scanning is an ideal solution for measuring the shape of the land and the 3D as-built survey in building construction site. Design drawing can be created based on the 3D point clouds with ease. As-built 3D data of the completed structure can be utilized to streamline the future maintenance of the structure.

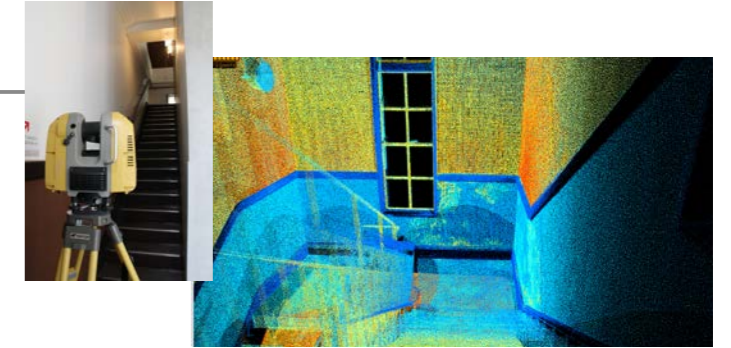


Facilities

Preliminary investigation and inspection is an indispensable process for factory renovation or relocation of factory equipment. GLS-2000 quickly measures and collects precise 3D point clouds without interrupting factory operation. High-density 3D point clouds can be widely utilized for generating schematics and simulation of piping or equipment installation. GLS-2000 can be operated safely even in areas where laser emission power is restricted; simply choose the low power (Class 1) mode.

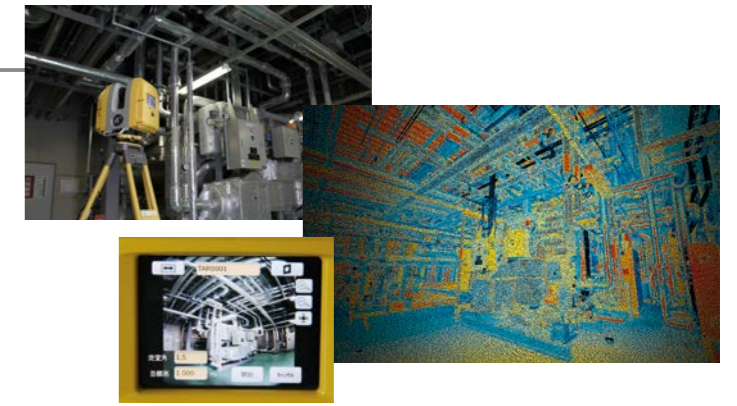

Historical Architecture / Cultural Heritage

In most cases, design schematics or drawings are not preserved for historical architecture and cultural heritage. Capturing 3D data by laser scanning is one of the most effective methods to measure these objects or artifacts without any damage to the objects. GLS-2000 obtains precise 3D point cloud data that not only replicates the objects' appearance but also material texture of the scanned objects. Schematic drawings can be created based on the 3D data for future maintenance or restoration works as well as for archiving and viewing.

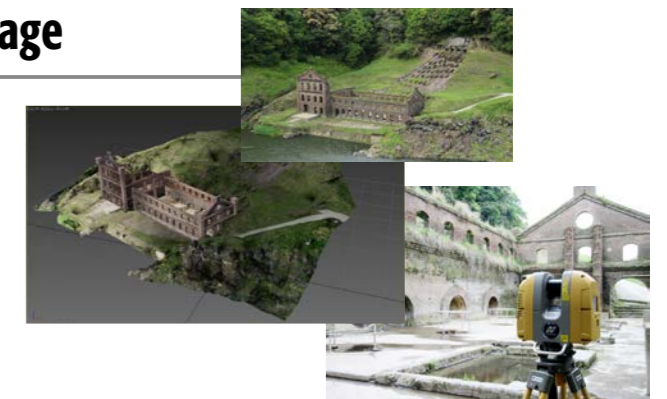

Maximum range at reflectivity

Reflectivity	9%	18%	90%
Short	40m (Detail)	90m (High Speed / Low Power)	130m (High Speed / Low Power)
Middle	40m (Detail)	150m (Standard)	350m (Standard)
Long	40m (Detail)	210m (Standard)	500m (Standard)

Reference object to be measured

Range Mode	Reference object to be measured
Detail	High definition objects, Archaeological sites, historical building, etc.
High Speed	Accident investigation, disasters area, short timeframe projects, etc.
Low Power	Heavy pedestrian area, laser limitation areas, etc.
Standard	Large structure, large residential area, volume measurement, etc.
Close	Objects difficult to measure* but located in short distance.
Close (High Power)	Objects which cannot be measured enough even with Close mode.
Road	Already built asphalt or concrete road surface.
Road (High Power)	Newly built asphalt road surface

* Wet objects, black cables, shiny duct, etc.